

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 191 614 A2**

(12)

**EUROPEAN PATENT APPLICATION**(43) Date of publication:  
27.03.2002 Bulletin 2002/13(51) Int Cl.<sup>7</sup>: H01L 51/20, H05B 33/14,  
C09K 11/06

(21) Application number: 01122939.0

(22) Date of filing: 25.09.2001

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 26.09.2000 JP 2000292491  
19.09.2001 JP 2001284601(71) Applicant: CANON KABUSHIKI KAISHA  
Ohta-ku, Tokyo (JP)

(72) Inventors:

- Tsuboyama, Akira  
Tokyo (JP)
- Mizutani, Hidemasa  
Tokyo (JP)

• Okada, Shinjiro

Tokyo (JP)

• Takiguchi, Takao

Tokyo (JP)

• Moriyama, Takashi

Tokyo (JP)

• Kamatani, Jun

Tokyo (JP)

(74) Representative:

Leson, Thomas Johannes Alois, Dipl.-Ing.

Tiedtke-Bühling-Kinne &amp; Partner GbR,


TBK-Patent,

Bavariaring 4

80336 München (DE)

(54) **Luminescence device and metal coordination compound therefor**

(57) A luminescence device is principally constituted by a pair of electrodes and an organic compound layer disposed therebetween. The organic compound layer contains a metal coordination compound characterized by having a partial structure represented by the following formula (1):



(1),


wherein each of N and C represents an atom constituting a cyclic group.

EP 1 191 614 A2


## Description

FIELD OF THE INVENTION AND RELATED ART


- 5 [0001] The present invention relates to a luminescence device and a metal coordination compound therefor. More specifically, the present invention relates to a luminescence device employing an organic metal coordination compound having platinum center metal as a luminescence material so as to allow stable luminescence efficiency, and a metal coordination compound adapted for use in the luminescence device.
- [0002] An organic electroluminescence EL device has been extensively studied as a luminescence device with a high responsiveness and high efficiency.
- 10 [0003] The organic EL device generally has a sectional structure as shown in Figure 1A or 1B (e.g., as described in "Macromol. Symp.", 125, pp. 1 - 48 (1997)).
- [0004] Referring to the figures, the EL device generally has a structure including a transparent substrate 15, a transparent electrode 14 disposed on the transparent substrate 15, a metal electrode 11 disposed opposite to the transparent electrode 14, and a plurality of organic (compound) layers disposed between the transparent electrode 14 and the metal electrode 11.
- 15 [0005] Referring to Figure 1, the EL device in this embodiment has two organic layers including a luminescence layer 12 and a hole transport layer 13.
- [0006] The transparent electrode 14 may be formed of a film of ITO (indium tin oxide) having a larger work function to ensure a good hole injection performance into the hole transport layer. On the other hand, the metal electrode 11 may be formed of a layer of aluminum, magnesium, alloys thereof, etc., having a smaller work function to ensure a good electron injection performance into the organic layer(s).
- 20 [0007] These (transparent and metal) electrodes 14 and 11 may be formed in a thickness of 50 - 200 nm.
- [0008] The luminescence layer 12 may be formed of, e.g., aluminum quinolinol complex (representative example thereof may include Alq3 described hereinafter) having an electron transporting characteristic and a luminescent characteristic. The hole transport layer 13 may be formed of, e.g., triphenyldiamine derivative (representative example thereof may include  $\alpha$ -NPD described hereinafter) having an electron donating characteristic.
- 25 [0009] The above-described EL device exhibits a rectification characteristic, so that when an electric field is applied between the metal electrode 11 as a cathode and the transparent electrode 14 as an anode, electrons are injected from the metal electrode 11 into the luminescence layer 12 and holes are injected from the transparent electrodes 14.
- 30 [0010] The thus-injected holes and electrons are recombined within the luminescence layer 12 to produce excitons, thus causing luminescence. At that time, the hole transport layer 13 functions as an electron-blocking layer to increase a recombination efficiency at the boundary between the luminescence layer 12 and the hole transport layer 13, thus enhancing a luminescence efficiency.
- 35 [0011] Referring to Figure 1B, in addition to the layers shown in Figure 1A, an electron transport layer 16 is disposed between the metal electrode 11 and the luminescence layer 12, whereby an effective carrier blocking performance can be ensured by separating functions of luminescence, electron transport and hole transport, thus allowing effective luminescence.
- [0012] The electron transport layer 16 may be formed of, e.g., oxadiazole derivatives.
- 40 [0013] In ordinary organic EL devices, fluorescence caused during a transition of luminescent center molecule from a singlet excited state to a ground state is used as luminescence.
- [0014] On the other hand, not the above fluorescence (luminescence) via singlet exciton, phosphorescence (luminescence) via triplet exciton has been studied for use in organic EL device as described in, e.g., "Improved energy transfer in electrophosphorescent device" (D.F. O'Brien et al., Applied Physics Letters, Vol. 74, No. 3, pp. 442 - 444 (1999)) and "Very high-efficiency green organic light-emitting devices based on electrophosphorescence" (M.A. Baldo et al., Applied Physics Letters, Vol. 75, No. 1, pp. 4 - 6 (1999)).
- 45 [0015] The EL devices shown in these documents may generally have a sectional structure shown in Figure 1C.
- [0016] Referring to Figure 1C, four organic layers including a hole transfer layer 13, a luminescence layer 12, an exciton diffusion-prevention layer 17, and an electron transport layer 16 are successively formed in this order on the transparent electrode (anode) 14.
- 50 [0017] In the above documents, higher efficiencies have been achieved by using four organic layers including a hole transport layer 13 of  $\alpha$ -NPD (shown below), an electron transport layer 16 of Alq3 (shown below), an exciton diffusion-prevention layer 17 of BPC (shown below), and a luminescence layer 12 of a mixture of CPB (shown below) as a host material with Ir(ppy)<sub>3</sub> (shown below) or PtOEP (shown below) as a guest phosphorescence material doped into CBP at a concentration of ca. 6 wt. %.
- 55

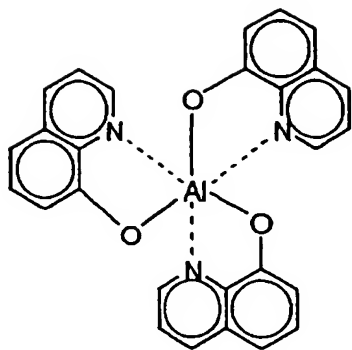


Alq3

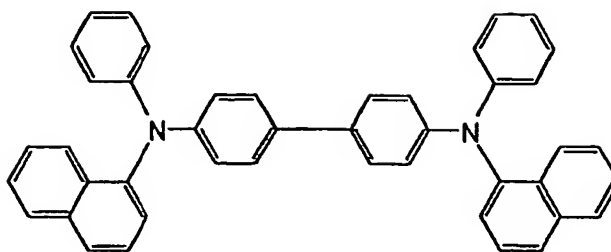


$\alpha$ -NPD

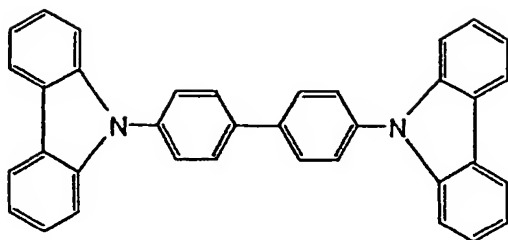


CBP



BCP



Ir(ppy)<sub>3</sub>

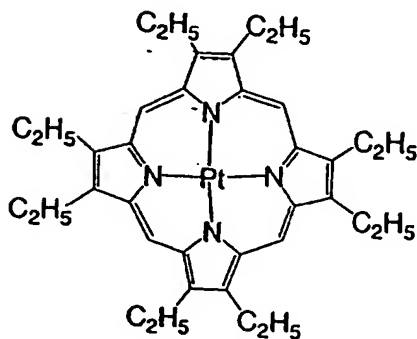

pt-OEP

Alq3: tris(8-hydroxyquinoline) aluminum (aluminum-quinolinol complex),  
 $\alpha$ -NPD: N4,N4'-di-naphthalene-1-yl-N4,N4'-diphenyl-biphenyl-4,4'-diamine (4,4'-bis[N-(1-naphthyl)-N-phenyl-amino]biphenyl),  
 CBP: 4,4'-N,N'-dicarbazole-biphenyl,  
 BCP: 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline,  
 Ir(ppy)<sub>3</sub>: fac tris(2-phenylpyridine)iridium (iridium-phenylpyridine complex), and  
 PtOEP: 2,3,7,8,12,13,17,18-octaethyl-21H,23H-porphine platinum (platinum-octaethyl porphine complex).

[0018] The phosphorescence (luminescence) material used in the luminescence layer 12 has attracted notice. This

is because the phosphorescence material is expected to provide a higher luminescence efficiency in principle.

[0019] More specifically, in the case of the phosphorescence material, excitons produced by recombination of carriers comprise singlet excitons and triplet excitons presented in a ratio of 1:3. For this reason, when fluorescence caused during the transition from the singlet excited state to the ground state is utilized, a resultant luminescence efficiency is 25 % (as upper limit) based on all the produced excitons in principle.

[0020] On the other hand, in the case of utilizing phosphorescence caused during transition from the triplet excited state, a resultant luminescence efficiency is expected to be at least three times that of the case of fluorescence in principle. In addition thereto, if intersystem crossing from the singlet excited state (higher energy level) to the triplet excited state is taken into consideration, the luminescence efficiency of phosphorescence can be expected to be 100 % (four times that of fluorescence) in principle.

[0021] The use of phosphorescence based on transition from the triplet excited state has also been proposed in, e. g., Japanese Laid-Open Patent Application (JP-A) 11-329739, JP-A 11-256148 and JP-A 8-319482.

[0022] However, the above-mentioned organic EL devices utilizing phosphorescence have accompanied with a problem of luminescent deterioration particularly in an energized state.

[0023] The reason for luminescent deterioration has not been clarified as yet but may be attributable to such a phenomenon that the life of triplet exciton is generally longer than that of singlet exciton by at least three digits, so that molecule is placed in a higher-energy state for a long period to cause reaction with ambient substance, formation of exciplex or excimer, change in minute molecular structure, structural change of ambient substance, etc.


[0024] Accordingly, the (electro)phosphorescence EL device is expected to provide a higher luminescence efficiency as described above, while the EL device is required to suppress or minimize the luminescent deterioration in energized state.

#### SUMMARY OF THE INVENTION

[0025] An object of the present invention is to provide a luminescence device capable of providing a high-efficiency luminescent state at a high brightness (or luminance) for a long period while minimizing the deterioration in luminescence in energized state.

[0026] Another object of the present invention is to provide a metal coordination compound as a material suitable for an organic layer for the luminescence device.

[0027] According to the present invention, there is provided a luminescence device, comprising: an organic compound layer comprising a metal coordination compound having a partial structure represented by the following formula (1):



wherein each of N and C represents an atom constituting a cyclic group.

[0028] According to the present invention, there is also provided a metal coordination compound, adapted for use in a luminescence device, having a partial structure represented by the following formula (1):



wherein each of N and C represents an atom constituting a cyclic group.

[0029] These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawing.

#### BRIEF DESCRIPTION OF THE DRAWING

[0030] Figures 1A, 1B and 1C are respectively a schematic sectional view of a layer structure of a luminescence device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0031] In the case where a luminescence layer for an organic EL device is formed of a carrier transporting host material and a phosphorescent guest material, a process of emission of light (phosphorescence) may generally involve the following steps:

- (1) transport of electron and hole within a luminescence layer,
- (2) formation of exciton of the host material,
- (3) transmission of excited energy between host material molecules,
- (4) transmission of excited energy from the host material molecule to the guest material molecule,
- (5) formation of triplet exciton of the guest material, and
- (6) emission of light (phosphorescence) caused during transition from the triplet excited state to the ground state of the guest material.


[0032] In the above steps, desired energy transmission and luminescence may generally be caused based on various deactivation and competition.

[0033] In order to improve a luminescence efficiency of the EL device, a luminescence center material per se is required to provide a higher yield of luminescence quantum. In addition thereto, an efficient energy transfer between host material molecules and/or between host material molecule and guest material molecule is also an important factor.

[0034] Further, the above-described luminescent deterioration in energized state may presumably relate to the luminescent center material per se or an environmental change thereof by its ambient molecular structure.

[0035] For this reason, our research group has extensively investigated an effect of use of the metal coordination compound (platinum complex) having a partial structure of formula (1) as the luminescent center material and as a result, has found that the metal coordination compound having the partial structure of formula (1) allows a high-efficiency luminescence (e.g., luminescence efficiency of at least 1 cd/W) with a high brightness (luminance) for a long period (e.g., a luminance half-life of at least 500 hours at an initial luminance of 100 cd/m<sup>2</sup>) (i.e., a decreased luminescent deterioration in energized state).

[0036] The metal coordination compound having a partial structure of formula (1) may preferably be represented by any one of the following formulas (1-1) to (1-6):





wherein CyN1 and CyN2 independently denote a cyclic group containing a nitrogen atom connected to Pt and capable of having a substituent, and CyC1 and CyC2 independently denote a cyclic group containing a carbon atom connected to Pt and capable of having a substituent, each of the substituents for CyN1, CyN2, CyC1 and CyC2 being selected from the group consisting of a halogen atom; nitro group; a trialkylsilyl group containing three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including a hydrogen atom which can be replaced with a fluorine atom.

[0037] The metal coordination compound may more preferably be represented by the formula (1-1) or the formula (1-2) in order to allow further improved high-efficient luminance while minimizing the luminescent deterioration in energized state.

[0038] At least one of CyN1 and CyN2 in the formulas (1-1) to (1-6) may preferably be a substituted or unsubstituted cyclic group having a ring structure selected from the group consisting of pyridine, pyrimidine, pyrazoline, pyrrole, pyrazole, quinoline, isoquinoline, and quinoxaline. Further, at least one of CyC1 and CyC2 in the formulas (1-1) to (1-6) may preferably be a substituted or unsubstituted cyclic group selected from the group consisting of phenyl, naphthyl, thienyl, benzothienyl, and quinolyl.

[0039] The metal coordination compound (platinum complex) specifically represented by the above formulas (1-1) to (1-6) causes phosphorescence (luminescence) and is assumed to have a lowest excited state comprising a triplet excited state liable to cause metal-to-ligand charge transfer (MLCT\* state). The phosphorescent emission of light (phosphorescence) is produced during the transition from the MLCT\* state to the ground state.

[0040] The metal coordination compound according to the present invention has been found to provide a higher phosphorescence yield of 0.05 - 0.9 and a shorter phosphorescence life of 1 - 30 μsec.

[0041] A phosphorescence yield (P(m)) is obtained based on the following equation:

$P(m)/P(s) = (S(m)/S(s)) \times (A(s)/A(m))$ , wherein P(m) represents a phosphorescence yield of an (unknown) objective luminescent material, P(s) represents a known (standard) phosphorescence yield of standard luminescent material (Ir(ppy)<sub>3</sub>), S(m) represents an integrated intensity of (photo-)excited emission spectrum of the objective material, S(s) represents a known integrated intensity of the standard material, A(m) represents an absorption spectrum of an excited light wavelength of the objective material, and A(s) represents a known absorption spectrum of the standard material.

[0042] The shorter phosphorescence life is necessary to provide a resultant EL device with a higher luminescence efficiency. This is because the longer phosphorescence life increases molecules placed in their triplet excited state which is a waiting state for phosphorescence, thus lowering the resultant luminescence efficiency particularly at a higher current density.

[0043] Accordingly, the metal coordination compound according to the present invention is a suitable luminescent material for an EL device with a higher phosphorescence yield and a shorter phosphorescence life.

[0044] In a conventional phosphorescent EL device uses the platinum-porphine complex (e.g., PtOEP described above) is used as the luminescent material. On the other hand, the metal coordination compound according to the

present invention has a carbon-platinum bond (C-Pt bond) in its molecular structure, thus particularly effectively exhibiting a heavy atom effect of platinum (Pt) compared to the case of N-Pt bond (in PtOEP). As a result, a spin-orbit interaction is enhanced to realize a higher phosphorescence yield and a shorter phosphorescence life at the same time.

[0045] Further, molecules of the metal coordination compound have a shorter time period wherein they stay in the triplet excited state, thus prolonging the life of the EL device with less deterioration. In this regard, the metal coordination compound according to the present invention has been substantiated to exhibit excellent stability of luminance as shown in Examples described hereinafter.

[0046] In the case of phosphorescent (luminescent) material, luminescent characteristics are largely affected by its molecular environment. On the other hand, principal characteristics of the fluorescent material are studied based on photoluminescence.

[0047] For this reason, results of photoluminescence of the phosphorescent material do not reflect luminescent characteristics of the resultant EL device in many cases since the luminescent characteristics in the case of the phosphorescent material depend on a magnitude of polarity of ambient host material molecules, ambient temperature, presence state of the material (e.g., solid state or liquid state, etc. Accordingly, different from the fluorescent material, it is generally difficult to expect the resultant EL characteristics for the phosphorescent material by simply removing a part of characteristics from photoluminescence results.

[0048] As a feature of molecular structure, the platinum complex has a planar structure, energy transfer of triplet exciton (i.e., energy transfer from host material molecule in the triplet excited state to guest material molecule) is performed based on electron exchange between adjacent molecules (so-called Dexter transfer). Accordingly, a degree of overlapping of electron cloud between adjacent molecules is an important factor, so that the planar (molecular) structure is suitable for efficient energy transfer.

[0049] On the other hand, Ir(ppy)<sub>3</sub> (iridium-phenylpyrimidine complex) as used in the above-described conventional EL device has a steric octahedral coordination structure, thus failing to perform efficient energy transfer (Dexter transfer) from host material molecule.

[0050] As described above, the metal coordination compound (platinum complex) according to the present invention is a suitable luminescent material for EL device.

[0051] The luminescence device (EL) device according to the present invention employs the above-mentioned metal coordination compound in an organic layer, particularly a luminescence layer.

[0052] Specifically, the luminescence device may preferably include the organic layer comprising the metal coordination compound between a pair of oppositely disposed electrodes comprising a transparent electrode (anode) and a metal electrode (cathode) which are supplied with a voltage to cause luminescence, thus constituting an electric-field luminescence device.

[0053] The liquid crystal of the present invention has a layer structure shown in Figures 1A to 1C as specifically described above.




[0054] By the use of the metal coordination compound of the present invention, the resultant luminescence device has a high luminescence efficiency as described above.

[0055] The luminescence device according to the present invention may be applicable to devices required to allow energy saving and high luminance, such as those for display apparatus and illumination apparatus, a light source for printers, and backlight (unit) for a liquid crystal display apparatus. Specifically, in the case of using the luminescence device of the present invention in the display apparatus, it is possible to provide a flat panel display apparatus capable of exhibiting an excellent energy saving performance, a high visibility and a good lightweight property. With respect to the light source, it becomes possible to replace a laser light source of laser beam printer currently used widely with the luminescence device according to the present invention. Further, when the luminescence device of the present invention is arranged in independently addressable arrays as an exposure means for effecting desired exposure of light to a photosensitive drum for forming an image, it becomes possible to considerably reducing the volume (size) of image forming apparatus. With respect to the illumination apparatus and backlight (unit), the resultant apparatus (unit) using the luminescence device of the present invention is expected to have an energy saving effect.

[0056] Hereinbelow, the metal coordination compound used in the luminescence device of the present invention will be described more specifically.


[0057] Specific and non-exhaustive examples of the metal coordination compound preferably having the above-mentioned formulas (1-1) to (1-6) may include those (Example Compound Nos. 101 - 267) shown in Tables 1 - 7.

[0058] In Tables 1 - 7, abbreviations for respective cyclic groups (CyN1, CyN2, CyC1, CyC2) represent groups shown below.


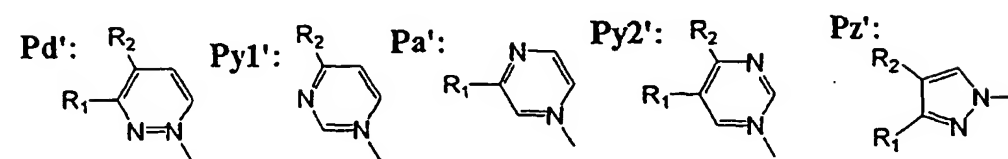
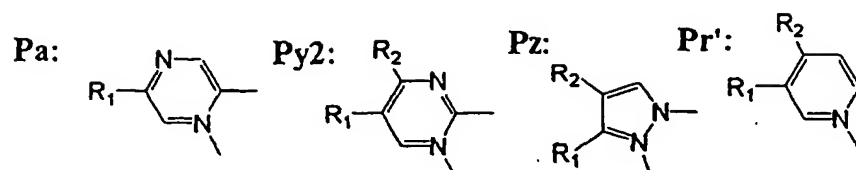
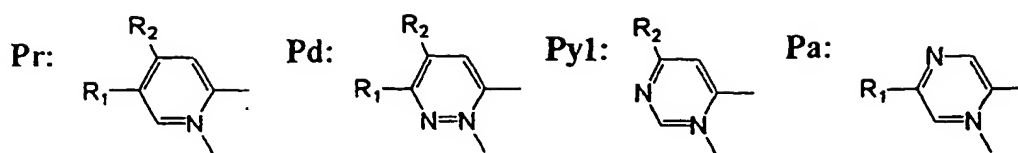


20

[0059] In the above structural formulas, an unconnected covalent (single) linkage extended from nitrogen atom (N) in a lower-right direction except for Pz' is a linkage connected to platinum atom (Pt), and the other unconnected covalent linkage is a linkage connected to an adjacent cyclic group.

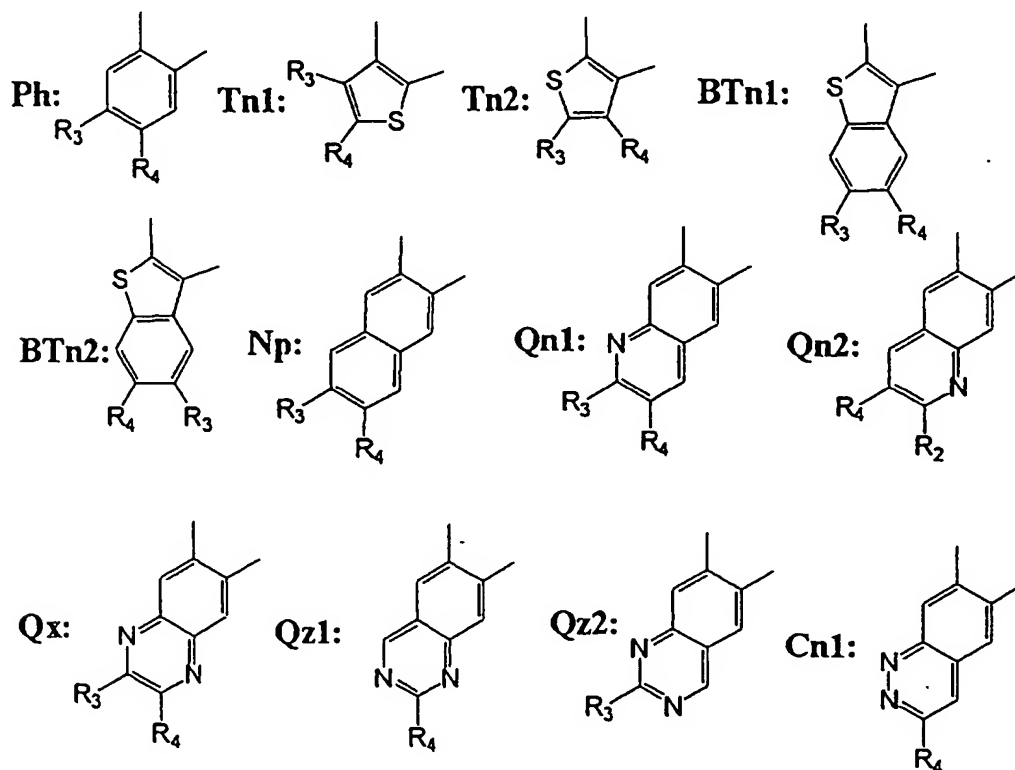



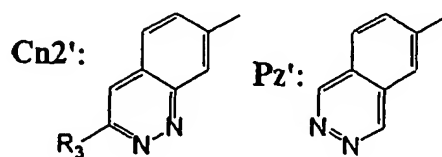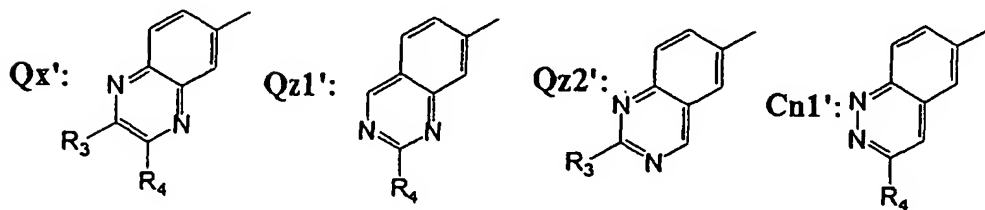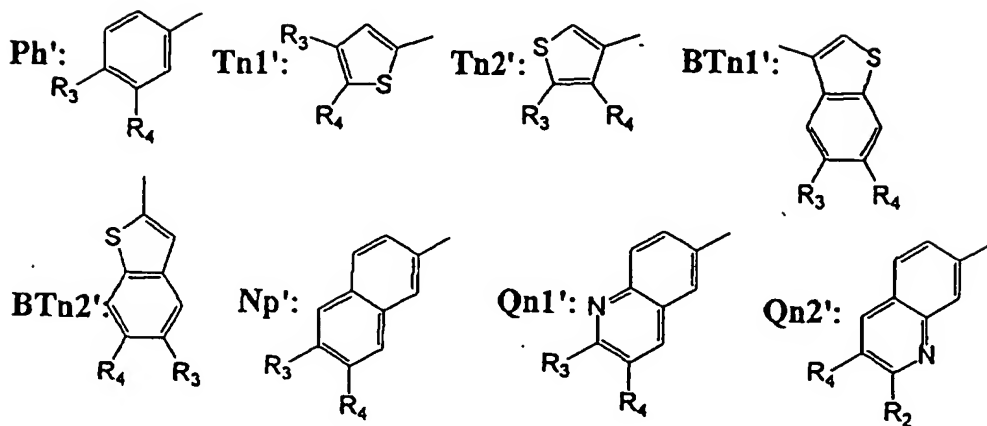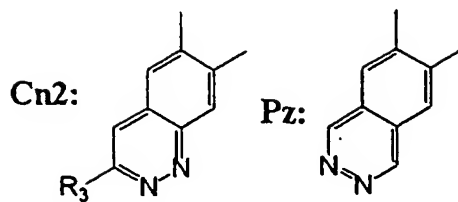

[0060] In the above structural formulas (Ph to Pz and Ph' to Pz'), an unconnected covalent (single) linkage extended in an upper-right direction is a linkage connected to platinum atom (Pt), and the other unconnected covalent linkage extended in an upper direction is a linkage connected to an adjacent cyclic group.

50

Table 1

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
101	( 1-1 )	Pr	Pr	Ph	Ph	H	H	H	H
102	( 1-1 )	Pr	Pr	Tn1	Tn1	H	H	H	H
103	( 1-1 )	Pr	Pr	Tn2	Tn2	H	H	H	H
104	( 1-1 )	Pr	Pr	Tn3	Tn3	H	H	H	H
105	( 1-1 )	Pr	Pr	BTn1	BTn1	H	H	H	H
106	( 1-1 )	Pr	Pr	BTn2	BTn2	H	H	H	H
107	( 1-1 )	Pr	Pr	Np	Np	H	H	H	H
108	( 1-1 )	Pr	Pr	Qn1	Qn1	H	H	H	H
109	( 1-1 )	Pr	Pr	Qn2	Qn2	H	H	H	H
110	( 1-1 )	Pa	Pa	Ph	Ph	H	H	H	H
111	( 1-1 )	Pa	Pa	Tn1	Tn1	H	H	H	H
112	( 1-1 )	Pa	Pa	Tn2	Tn2	H	H	H	H
113	( 1-1 )	Pa	Pa	Tn3	Tn3	H	H	H	H
114	( 1-1 )	Pa	Pa	BTn1	BTn1	H	H	H	H
115	( 1-1 )	Pa	Pa	BTn2	BTn2	H	H	H	H
116	( 1-1 )	Pa	Pa	Np	Np	H	H	H	H
117	( 1-1 )	Pa	Pa	Qn1	Qn1	H	H	H	H
118	( 1-1 )	Pa	Pa	Qn2	Qn2	H	H	H	H
119	( 1-1 )	Ps	Ps	Ph	Ph	H	H	H	H
120	( 1-1 )	Ps	Ps	Tn1	Tn1	H	H	H	H
121	( 1-1 )	Ps	Ps	Tn2	Tn2	H	H	H	H
122	( 1-1 )	Ps	Ps	Tn3	Tn3	H	H	H	H
123	( 1-1 )	Ps	Ps	BTn1	BTn1	H	H	H	H
124	( 1-1 )	Ps	Ps	BTn2	BTn2	H	H	H	H
125	( 1-1 )	Ps	Ps	Np	Np	H	H	H	H

Table 2

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
126	(1-1)	Ps	Ps	Qn1	Qn1	H	H	H	H
127	(1-1)	Ps	Ps	Qn2	Qn2	H	H	H	H
128	(1-2)	Pr	Pr	Ph	Ph	H	H	H	H
129	(1-2)	Pr	Pr	Tn1	Tn1	H	H	H	H
130	(1-2)	Pr	Pr	Tn2	Tn2	H	H	H	H
131	(1-2)	Pr	Pr	BTn1	BTn1	H	H	H	H
132	(1-2)	Pr	Pr	BTn2	BTn2	H	H	H	H
133	(1-2)	Pr	Pr	Kp	Kp	H	H	H	H
134	(1-2)	Pr	Pr	Qn1	Qn1	H	H	H	H
135	(1-2)	Pr	Pr	Qn2	Qn2	H	H	H	H
136	(1-2)	Pr	Pr	Qx	Qx	H	H	H	H
137	(1-2)	Pr	Pr	Qx1	Qx1	H	H	H	H
138	(1-2)	Pr	Pr	Qx2	Qx2	H	H	H	H
139	(1-2)	Pr	Pr	Cn1	Cn1	H	H	H	H
140	(1-2)	Pr	Pr	Cn2	Cn2	H	H	H	H
141	(1-2)	Pr	Pr	Ps	Ps	H	H	H	H
142	(1-2)	Pd	Pd	Ph	Ph	H	H	H	H
143	(1-2)	Pd	Pd	Tn1	Tn1	H	H	H	H
144	(1-2)	Pd	Pd	Tn2	Tn2	H	H	H	H
145	(1-2)	Pd	Pd	BTn1	BTn1	H	H	H	H
146	(1-2)	Pd	Pd	BTn2	BTn2	H	H	H	H
147	(1-2)	Pd	Pd	Kp	Kp	H	H	H	H
148	(1-2)	Pd	Pd	Qn1	Qn1	H	H	H	H
149	(1-2)	Pd	Pd	Qn2	Qn2	H	H	H	H
150	(1-2)	Pd	Pd	Qx	Qx	H	H	H	H

Table 3

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
151	(1-2)	Pd	Pd	Qx1	Qx1	H	H	H	H
152	(1-2)	Pd	Pd	Qx2	Qx2	H	H	H	H
153	(1-2)	Pd	Pd	Cn1	Cn1	H	H	H	H
154	(1-2)	Pd	Pd	Cn2	Cn2	H	H	H	H
155	(1-2)	Pd	Pd	Px	Px	H	H	H	H
156	(1-2)	Py1	Py1	Ph	Ph	H	H	H	H
157	(1-2)	Py1	Py1	Tn1	Tn1	H	H	H	H
158	(1-2)	Py1	Py1	Tn2	Tn2	H	H	H	H
159	(1-2)	Py1	Py1	BTn1	BTn1	H	H	H	H
160	(1-2)	Py1	Py1	BTn2	BTn2	H	H	H	H
161	(1-2)	Py1	Py1	Np	Np	H	H	H	H
162	(1-2)	Py1	Py1	Qn1	Qn1	H	H	H	H
163	(1-2)	Py1	Py1	Qn2	Qn2	H	H	H	H
164	(1-2)	Py1	Py1	Qx	Qx	H	H	H	H
165	(1-2)	Py1	Py1	Qx1	Qx1	H	H	H	H
166	(1-2)	Py1	Py1	Qx2	Qx2	H	H	H	H
167	(1-2)	Py1	Py1	Cn1	Cn1	H	H	H	H
168	(1-2)	Py1	Py1	Cn2	Cn2	H	H	H	H
169	(1-2)	Py1	Py1	Px	Px	H	H	H	H
170	(1-2)	Pa	Pa	Ph	Ph	H	H	H	H
171	(1-2)	Pa	Pa	Tn1	Tn1	H	H	H	H
172	(1-2)	Pa	Pa	Tn2	Tn2	H	H	H	H
173	(1-2)	Pa	Pa	BTn1	BTn1	H	H	H	H
174	(1-2)	Pa	Pa	BTn2	BTn2	H	H	H	H
175	(1-2)	Pa	Pa	Np	Np	H	H	H	H

Table 4

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
176	(1-2)	Pa	Pa	Qn1	Qn1	H	H	H	H
177	(1-2)	Pa	Pa	Qn2	Qn2	H	H	H	H
178	(1-2)	Pa	Pa	Qx	Qx	H	H	H	H
179	(1-2)	Pa	Pa	Qs1	Qs1	H	H	H	H
180	(1-2)	Pa	Pa	Qs2	Qs2	H	H	H	H
181	(1-2)	Pa	Pa	Cn1	Cn1	H	H	H	H
182	(1-2)	Pa	Pa	Cn2	Cn2	H	H	H	H
183	(1-2)	Pa	Pa	Pz	Pz	H	H	H	H
184	(1-2)	Py2	Py2	Ph	Ph	H	H	H	H
185	(1-2)	Py2	Py2	Tn1	Tn1	H	H	H	H
186	(1-2)	Py2	Py2	Tn2	Tn2	H	H	H	H
187	(1-2)	Py2	Py2	BTn1	BTn1	H	H	H	H
188	(1-2)	Py2	Py2	BTn2	BTn2	H	H	H	H
189	(1-2)	Py2	Py2	Np	Np	H	H	H	H
190	(1-2)	Py2	Py2	Qn1	Qn1	H	H	H	H
191	(1-2)	Py2	Py2	Qn2	Qn2	H	H	H	H
192	(1-2)	Py2	Py2	Qx	Qx	H	H	H	H
193	(1-2)	Py2	Py2	Qs1	Qs1	H	H	H	H
194	(1-2)	Py2	Py2	Qs2	Qs2	H	H	H	H
195	(1-2)	Py2	Py2	Cn1	Cn1	H	H	H	H
196	(1-2)	Py2	Py2	Cn2	Cn2	H	H	H	H
197	(1-2)	Py2	Py2	Pz	Pz	H	H	H	H
198	(1-2)	Pz	Pz	Ph	Ph	H	H	H	H
199	(1-2)	Pz	Pz	Tn1	Tn1	H	H	H	H
200	(1-2)	Pz	Pz	Tn2	Tn2	H	H	H	H

Table 5

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
201	(1-2)	Ps	Ps	BTn1	BTn1	H	H	H	H
202	(1-2)	Ps	Ps	BTn2	BTn2	H	H	H	H
203	(1-2)	Ps	Ps	Np	Np	H	H	H	H
204	(1-2)	Ps	Ps	Qn1	Qn1	H	H	H	H
205	(1-2)	Ps	Ps	Qn2	Qn2	H	H	H	H
206	(1-2)	Ps	Ps	Qx	Qx	H	H	H	H
207	(1-2)	Ps	Ps	Qx1	Qx1	H	H	H	H
208	(1-2)	Ps	Ps	Qx2	Qx2	H	H	H	H
209	(1-2)	Ps	Ps	Cn1	Cn1	H	H	H	H
210	(1-2)	Ps	Ps	Cn2	Cn2	H	H	H	H
211	(1-2)	Ps	Ps	Ps	Ps	H	H	H	H
212	(1-3)	Pr'	Pr'	Ph	Ph	H	H	H	H
213	(1-3)	Pd'	Pd'	Ph	Ph	H	H	H	H
214	(1-3)	Py1'	Py1'	Ph	Ph	H	H	H	H
215	(1-3)	Pa'	Pa'	Tn1	Tn1	H	H	H	H
216	(1-3)	Py2'	Py2'	Tn2	Tn2	H	H	H	H
217	(1-3)	Ps2'	Ps2'	BTn1	BTn1	H	H	H	H
218	(1-4)	Pr	Pr	Ph'	Ph'	H	H	H	H
219	(1-4)	Pd	Pd	Ph'	Ph'	H	H	H	H
220	(1-4)	Py1	Py1	Tn1'	Tn1'	H	H	H	H
221	(1-4)	Pa	Pa	Tn1'	Tn1'	H	H	H	H
222	(1-4)	Py2	Py2	Qx'	Qx'	H	H	H	H
223	(1-4)	Ps2	Ps2	Qx1'	Qx1'	H	H	H	H
224	(1-5)	Pr	Pr'	Ph	Ph'	H	H	H	H
225	(1-5)	Pd	Pr'	Ph	Ph'	H	H	H	H

Table 6

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
226	(1-5)	Pr	Pr'	Ta1	Pb'	H	H	H	H
227	(1-5)	Pa	Pr'	Pb	Pb'	H	H	H	H
228	(1-5)	Pa	Pr'	Ta1	Pb'	H	H	H	H
229	(1-5)	Pa	Pr'	Ta2	Pb'	H	H	H	H
230	(1-6)	Pr'	Pr'	Pb'	Pb'	H	H	H	H
231	(1-6)	Pa'	Pa'	Pb'	Pb'	H	H	H	H
232	(1-6)	Pa'	Pa'	Pb'	Pb'	H	H	H	H
233	(1-2)	Pr	Pr	Pb	Pb	H	OCH <sub>3</sub>	H	H
234	(1-2)	Pr	Pr	Pb	Pb	CF <sub>3</sub>	H	H	H
235	(1-2)	Pr	Pr	Pb	Pb	H	OCF <sub>3</sub>	H	H
236	(1-2)	Pr	Pr	Pb	Pb	H	F	H	H
237	(1-2)	Pr	Pr	Pb	Pb	F	H	H	H
238	(1-2)	Pr	Pr	Pb	Pb	H	C <sub>2</sub> H <sub>5</sub>	H	H
239	(1-2)	Pr	Pr	Pb	Pb	C <sub>2</sub> H <sub>5</sub>	H	H	H
240	(1-2)	Pr	Pr	Pb	Pb	H	H	H	CH <sub>3</sub>
241	(1-2)	Pr	Pr	Pb	Pb	H	H	H	C <sub>3</sub> H <sub>7</sub>
242	(1-2)	Pr	Pr	Pb	Pb	H	H	H	OCH <sub>3</sub>
243	(1-2)	Pr	Pr	Pb	Pb	H	H	H	F
244	(1-2)	Pr	Pr	Pb	Pb	H	H	H	NO <sub>2</sub>
245	(1-2)	Pr	Pr	Pb	Pb	H	H	NO <sub>2</sub>	H
246	(1-2)	Pr	Pr	Pb	Pb	H	H	H	CH <sub>3</sub> CH≡ CHCH <sub>2</sub> CH <sub>3</sub>
247	(1-2)	Pr	Pr	Pb	Pb	H	H	H	CH <sub>3</sub> C=CH <sub>2</sub> CH <sub>3</sub>
248	(1-2)	Pr	Pr	Pb	Pb	H	H	H	CF <sub>3</sub>
249	(1-2)	Pr	Pr	Pb	Pb	H	H	H	COOC <sub>2</sub> H <sub>5</sub>
250	(1-2)	Pr	Pr	Pb	Pb	H	H	H	COOC <sub>3</sub> H <sub>7</sub>



Table 7

Ex. Comp.	Formula	CyN1	CyN2	CyC1	CyC2	R1	R2	R3	R4
251	(1-2)	Pr	Pr	Ph	Ph	H	H	CH <sub>3</sub>	H
252	(1-2)	Pr	Pr	Ph	Ph	H	H	F	H
253	(1-2)	Pr	Pr	Ph	Ph	H	H	OCH <sub>3</sub>	H
254	(1-2)	Pr	Pr	Ph	Ph	H	H	H	SCH <sub>3</sub>
255	(1-2)	Pr	Pr	TaI	TaI	H	H	H	Si(CH <sub>3</sub> ) <sub>3</sub>
256	(1-2)	Pr	Pr	TaI	TaI	H	H	H	CH <sub>3</sub>
257	(1-2)	Pr	Pr	TaI	TaI	H	H	H	OCH <sub>3</sub>
258	(1-2)	Pr	Pr	TaI	TaI	H	H	H	F
259	(1-2)	Pr	Pr	TaI	TaI	H	H	H	CF <sub>3</sub>
260	(1-2)	Pr	Pr	TaI	TaI	H	H	H	C <sub>3</sub> H <sub>7</sub>
261	(1-2)	Pr	Pr	TaI	TaI	F	H	H	H
262	(1-2)	Pr	Pr	TaI	TaI	H	CH <sub>3</sub>	H	H
263	(1-2)	Pr	Pr	TaI	TaI	H	OCH <sub>3</sub>	H	H
264	(1-2)	Pr	Pr	TaI	TaI	H	CF <sub>3</sub>	H	H
265	(1-4)	Pr	Pr	Ph'	Ph'	H	H	OCH <sub>3</sub>	OCH <sub>3</sub>
266	(1-6)	Pr'	Pr'	Ph'	Ph'	H	H	OCH <sub>3</sub>	H
267	(1-6)	Pr'	Pr'	Ph'	Ph'	H	H	OCH <sub>3</sub>	H



[0061] Of the metal coordination compound preferably having the above-mentioned formulas (1-1) to (1-6), those of formulas (1-1) and (1-2) may, e.g., be synthesized through the following reaction schemes.



(1-1)



(1-2)




[0062] Hereinbelow, the present invention will be described more specifically based on Examples with reference to the drawing.


#### Examples 1 - 11

[0063] In these examples, the following metal coordination compounds (Pt complexes) 1 - 11 were used in respective luminescence layers for Examples 1 - 11, respectively.


Compound 1




Compound 2




Compound 3




Compound 4




Compound 5




Compound 6




Compound 7




Compound 8




Compound 9



Compound 10



Compound 11



[0064] Each of luminescence devices having a structure shown in Figure 1B were prepared in the following manner.

[0065] On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm<sup>2</sup>.

[0066] On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10<sup>-4</sup> Pa).

Organic layer 1 (hole transport layer 13) (40 nm):  $\alpha$ -NPD

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP:Pt complex (metal coordination compound) (95:5 by weight)

Organic layer 3 (electron transport layer 16) (30 nm): Alq3

Metal electrode layer 1 (metal electrode 11) (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11) (100 nm): Al


[0067] Each of the thus-prepared luminescence devices was taken out of the vacuum chamber and was subjected to a continuous energization test in an atmosphere of dry nitrogen gas stream so as to remove device deterioration factors, such as oxygen and moisture (water content).

[0068] The continuous energization test was performed by continuously applying a voltage at a constant current density of 70 mA/cm<sup>2</sup> to the luminescence device having the ITO (transparent) electrode (as an anode) and the Al (metal) electrode (as a cathode), followed by measurement of luminance (brightness) with time so as to determine a time (luminance half-life) required for decreasing an initial luminance (80 - 120 cd/m<sup>2</sup>) to 1/2 thereof.

[0069] The results are shown in Table 8 appearing hereinafter.

#### Comparative Example 1

[0070] A comparative luminescence device was prepared and evaluated in the same manner as in Example 1 - 11 except that the Pt complex (metal coordination compounds 1 - 11) was changed to Ir-phenylpyrimidine complex (Ir(ppy)<sub>3</sub>) shown below.



[0071] The results are shown in Table 8 below.


Table 8

Ex. No.	Compound No.	Luminance half-life (Hr)
Ex. 1	1	500
Ex. 2	2	400
Ex. 3	3	600
Ex. 4	4	650
Ex. 5	5	950
Ex. 6	6	800
Ex. 7	7	850
Ex. 8	8	600
Ex. 9	9	450
Ex. 10	10	900
Ex. 11	11	550
Comp.Ex. 1	Ir(ppy) <sub>3</sub>	350

[0072] The luminescence devices using the metal coordination compounds 3, 5, 6, 7 and 11 caused red luminescence, and the luminescence devices using the metal coordination compounds 2 and 4 caused orange luminescence. Further, the luminescence devices using the metal coordination compounds 1 and Ir(ppy)<sub>3</sub> caused green luminescence.

#### Example 12 (Synthesis of Compound 2)


[0073]

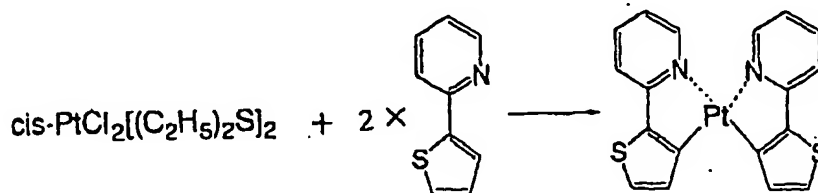

[0074] In a 3 liter-three necked flask, 14.6 g (90.6 mM) of 2-(2-thienyl)pyridine and 912 ml of anhydrous ether were placed and stirred at -70 °C or below in an argon gas stream. To the mixture, 62.2 ml (99.5 mM) of 1.6M-t-butyllithium solution in pentane was added dropwise in ca. 35 min., followed by stirring at -70 °C for 40 min. At that temperature, a suspension of 8.5 g (19.0 mM) of cis-PtCl<sub>2</sub>[(C<sub>2</sub>H<sub>5</sub>)<sub>2</sub>S]<sub>2</sub> in a mixture solvent of 289 ml of anhydrous ether and 73 ml of tetrahydrofuran (THF) was added dropwise in ca. 1 hour to the resultant mixture, followed by stirring at -70 °C for 30 min. and gradual temperature rise up to 0 °C in ca. 2 hours. To the reaction mixture, 912 ml of water was gradually added dropwise at 0 °C. The organic layer was washed with common salt aqueous solution and the aqueous (water) layer was subjected to extraction with methylene chloride. The resultant organic layer (from the organic and aqueous layers) was dried with anhydrous sodium sulfate, followed by distilling-off of the solvent to obtain a residue. The residue was recrystallized from a mixture solvent (hexane/methylene chloride) to obtain 4.50 g of cis-bis[2-(2-thienyl)pyridinato-N,C<sup>5</sup>] platinum (II) (Yield: 45.8 %).


#### Example 13 (Synthesis of Compound 5)

[0075]



[0076] In a 1 liter-three necked flask, 26.6 g (168.5 mM) of 2-bromopyridine, 30.0 g (168.5 mM) of benzo[b]thiophene-2-boronic acid, 170 ml of toluene, 85 ml of ethanol and 170 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 6.18 g (5.35 mM) of tetrakis (triphenyl-phosphine) palladium (0) was added, followed by heat-refluxing for 5.5 hours under stirring in nitrogen gas stream.


[0077] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 5/1) to obtain a colorless crystal. The crystal was purified by alumina column chromatography (eluent: toluene) and recrystallized from ethanol to obtain 12.6 g of 2-(pyridine-2-yl)benzo[b]thiophene (Yield: 35.4 %).

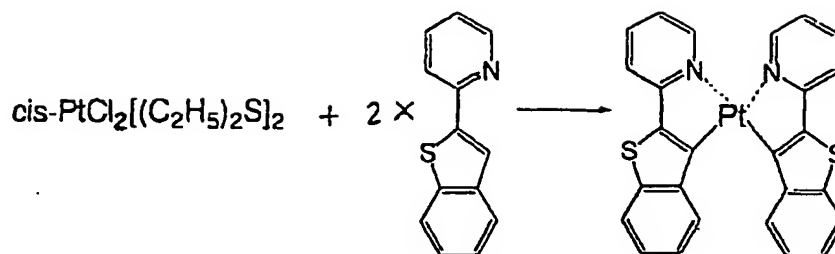


[0078] In a 3 liter-three necked flask, 6.73 g (31.9 mM) of 2-(benzo[b]thiophene-2-yl)pyridine and 636 ml of anhydrous ether were placed and stirred at -70 °C or below in an argon gas stream. To the mixture, 21.9 ml (35.0 mM) of 1.6M-t-butyllithium solution in pentane was added dropwise in ca. 20 min., followed by stirring at -70 °C for 50 min. At that temperature, a suspension of 2.97 g (6.68 mM) of cis-PtCl<sub>2</sub>[(C<sub>2</sub>H<sub>5</sub>)<sub>2</sub>S]<sub>2</sub> in a mixture solvent of 101 ml of anhydrous ether and 25 ml of tetrahydrofuran (THF) was added dropwise in ca. 30 min. to the resultant mixture, followed by stirring at -70 °C for 1 hour. and gradual temperature rise up to 0 °C in ca. 2 hours. To the reaction mixture, 318 ml of water was gradually added dropwise at 0 °C. The organic layer was washed with common salt aqueous solution and the aqueous (water) layer was subjected to extraction with methylene chloride. The resultant organic layer (from the organic and aqueous layers) was dried with anhydrous sodium sulfate, followed by distilling-off of the solvent to obtain a residue. The residue was recrystallized from a mixture solvent (hexane/methylene chloride) to obtain 3.10 g of cis-bis[2-(benzo [b]thiophene-2-yl)pyridinato-N,C<sup>5</sup>] platinum (II) (Yield: 75.4 %).

25 Example 14 (Synthesis of Compound 3)

[0079]

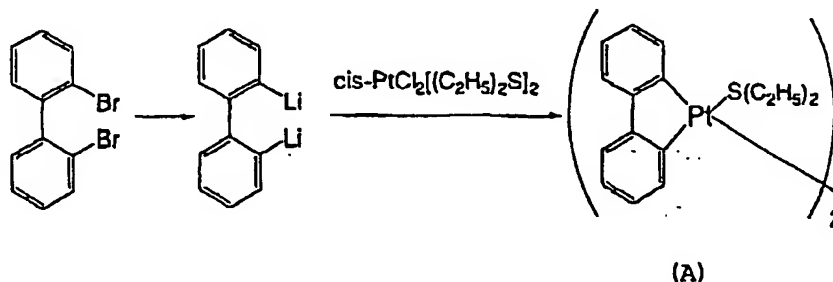

[0080] In a 3 liter-three necked flask, 35.0 g (112 mM) of 2,2'-dibromobiphenyl and 650 ml of anhydrous ether were placed and stirred at -60 °C or below in an argon gas stream. To the mixture, 153 ml (0.245 mM) of 1.6M-n-butyllithium solution in pentane was added dropwise in ca. 50 min., followed by temperature rise and stirring at room temperature for 3 hours. To a suspension of 25.0 g (56.0 mM) of cis-PtCl<sub>2</sub>[(C<sub>2</sub>H<sub>5</sub>)<sub>2</sub>S]<sub>2</sub> in 833 ml of anhydrous ether cooled and kept at -10 °C or below, the resultant mixture was added dropwise in ca. 10 min., followed by stirring at -10 °C for 1 hour and gradual temperature rise up to 0 °C. To the reaction mixture, 417 ml of water was gradually added dropwise at 0 °C. The organic layer was washed with common salt aqueous solution and the aqueous (water) layer was subjected to extraction with methylene chloride. The resultant organic layer (from the organic and aqueous layers) was dried with anhydrous sodium sulfate, followed by distilling-off of the solvent to obtain a residue. The residue was successively recrystallized from a mixture solvent (hexane/ether) and a mixture solvent (hexane/methylene chloride) to obtain 1.77 g of a compound (A) (Yield: 7.2 %).

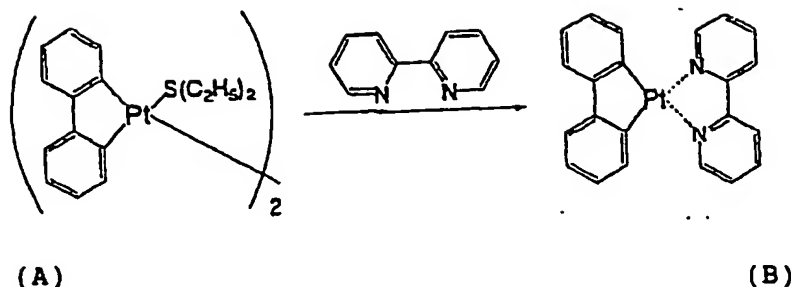

[0081] In a 100 ml-three-necked flask, 21.3 g (136 mM) of 2,2'-dipyridyl was placed and melted at 80 °C in an argon gas stream, followed by addition of 1.73 g (1.98 mM) of the above-prepared compound (A). The mixture was stirred at 80 °C for 10 min. under reduced pressure and cooled to ca. 10 °C to crystallize the mixture. The crystallized mixture was dissolved in methylene chloride and thereto, hexane was added to reprecipitate a crystal. The crystal was recovered by filtration, followed by recrystallization from a mixture solvent (hexane/methylene chloride) to obtain 1.90 g of an objective compound (B) (Yield: 95.4 %).

Examples 15 - 20 (Synthesis of Compounds 1, 4, 6, 7, 8 and 11)

[0082] Compounds 1, 4, 6, 7, 8 and 11 were prepared in a similar manner as in Example 12, respectively.

Examples 21 and 22 (Synthesis of Compounds 9 and 10)

[0083] Compounds 9 and 10 were prepared in a similar manner as in Example 14, respectively.

[0084] As described hereinabove, according to the present invention, the metal coordination compound (Pt complex) preferably having the formulas (1-1) to (1-6) according to the present invention has a higher phosphorescence luminescence efficiency and a shorter phosphorescence life, thus being suitable as a luminescence material for an EL device.

[0085] The luminescence device (EL device) using the metal coordination compound according to the present invention allows a high-efficiency luminescence at a high luminescence for a long period of time while minimizing luminescence deterioration in energized state.

[0086] A luminescence device is principally constituted by a pair of electrodes and an organic compound layer disposed therebetween. The organic compound layer contains a metal coordination compound characterized by having a partial structure represented by the following formula (1):



wherein each of N and C represents an atom constituting a cyclic group.

#### Claims

1. A luminescence device, comprising: an organic compound layer comprising a metal coordination compound having a partial structure represented by the following formula (1):



wherein each of N and C represents an atom constituting a cyclic group.

2. A device according to Claim 1, wherein the metal coordination compound is represented by any one of the following formulas (1-1) to (1-6):



wherein CyN1 and CyN2 independently denote a cyclic group containing a nitrogen atom connected to Pt and capable of having a substituent, and CyC1 and CyC2 independently denote a cyclic group containing a carbon atom connected to Pt and capable of having a substituent, each of the substituents for CyN1, CyN2, CyC1 and CyC2 being selected from the group consisting of a halogen atom; nitro group; a trialkylsilyl group containing three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including a hydrogen atom which can be replaced with a fluorine atom.

3. A device according to Claim 2, wherein the metal coordination compound is represented by the formula (1-1) or the formula (1-2).



4. A device according to Claim 2 or 3, wherein at least one of CyN1 and CyN2 in the formulas (1-1) to (1-6) is a substituted or unsubstituted cyclic group having a ring structure selected from the group consisting of pyridine, pyrimidine, pyrazoline, pyrrole, pyrazole, quinoline, isoquinoline, and quinoxaline.
5. A device according to any one of Claims 2-4, wherein at least one of CyC1 and CyC2 in the formulas (1-1) to (1-6) is a substituted or unsubstituted cyclic group selected from the group consisting of phenyl, naphthyl, thienyl, benzothienyl, and quinolyl.
6. A device according to any one of Claims 1-5, further comprising a pair of electrodes oppositely disposed to sandwich the organic compound layer, wherein a voltage is applied between the pair of electrodes to cause luminescence.
7. A metal coordination compound, adapted for use in a luminescence device, having a partial structure represented by the following formula (1):



wherein each of N and C represents an atom constituting a cyclic group.

8. A compound according to Claim 7, which is represented by any one of the following formulas (1-1) to (1-6):





wherein CyN1 and CyN2 independently denote a cyclic group containing a nitrogen atom connected to Pt and capable of having a substituent, and CyC1 and CyC2 independently denote a cyclic group containing a carbon atom connected to Pt and capable of having a substituent, each of the substituents for CyN1, CyN2, CyC1 and CyC2 being selected from the group consisting of a halogen atom; nitro group; a trialkylsilyl group containing three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including a hydrogen atom which can be replaced with a fluorine atom.

9. A compound according to Claim 8, which is represented by the formula (1-1) or the formula (1-2).

10. A compound according to Claim 8 or 9, wherein at least one of CyN1 and CyN2 in the formulas (1-1) to (1-6) is a substituted or unsubstituted cyclic group having a ring structure selected from the group consisting of pyridine, pyrimidine, pyrazoline, pyrrole, pyrazole, quinoline, isoquinoline, and quinoxaline.

11. A compound according to any one of Claims 8-10, wherein at least one of CyC1 and CyC2 in the formulas (1-1) to (1-6) is a substituted or unsubstituted cyclic group selected from the group consisting of phenyl, naphthyl, thienyl, benzothienyl, and quinolyl.

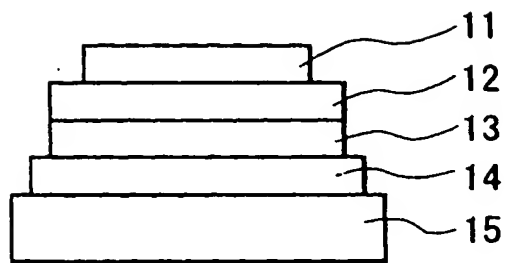


FIG. 1A

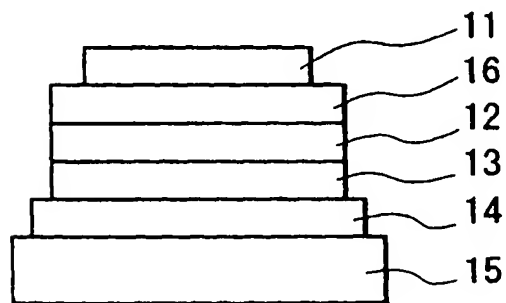


FIG. 1B

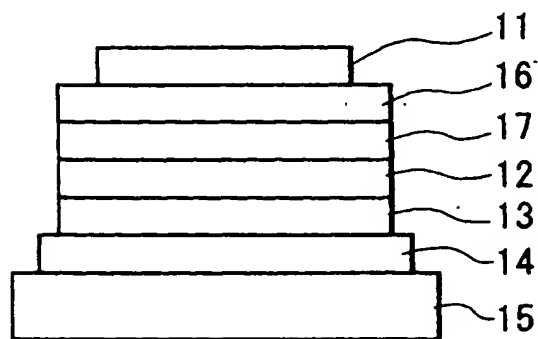


FIG. 1C

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 191 614 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
18.06.2003 Bulletin 2003/25

(51) Int Cl.<sup>7</sup>: **H01L 51/20, H05B 33/14,  
C09K 11/06, C07F 15/00**

(43) Date of publication A2:  
27.03.2002 Bulletin 2002/13

(21) Application number: **01122939.0**

(22) Date of filing: **25.09.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **26.09.2000 JP 2000292491**  
**19.09.2001 JP 2001284601**

(71) Applicant: **CANON KABUSHIKI KAISHA**  
**Ohta-ku, Tokyo (JP)**


(72) Inventors:  
• **Tsuboyama, Akira**  
**Tokyo (JP)**  
• **Mizutani, Hidemasa**  
**Tokyo (JP)**

• **Okada, Shinjiro**  
**Tokyo (JP)**  
• **Takiguchi, Takao**  
**Tokyo (JP)**  
• **Moriyama, Takashi**  
**Tokyo (JP)**  
• **Kamatahi, Jun**  
**Tokyo (JP)**

(74) Representative:  
**Leson, Thomas Johannes Alois, Dipl.-Ing.**  
**Tiedtke-Bühling-Kinne & Partner GbR,**  
**TBK-Patent,**  
**Bavariaring 4**  
**80336 München (DE)**

(54) **Luminescence device and metal coordination compound therefor**

(57) A luminescence device is principally constituted by a pair of electrodes and an organic compound layer disposed therebetween. The organic compound layer contains a metal coordination compound characterized by having a partial structure represented by the following formula (1):



(1),

wherein each of N and C represents an atom constituting a cyclic group.

**EP 1 191 614 A3**



European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 01 12 2939 shall be considered, for the purposes of subsequent proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
P,X	WO 00 57676 A (UNIV SOUTHERN CALIFORNIA) 28 September 2000 (2000-09-28) * page 17, Scheme 1, compounds Pt(Phpy) <sub>2</sub> , Pt(Thpy) <sub>2</sub> , and Pt(Bhq) <sub>2</sub> , claims *	1-11	H01L51/20 H05B33/14 C09K11/06 C07F15/00
D,A	BALDO M A ET AL: "VERY HIGH-EFFICIENCY GREEN ORGANIC LIGHT-EMITTING DEVICES BASED ON ELECTROPHOSPHORESCENCE" APPLIED PHYSICS LETTERS, AMERICAN INSTITUTE OF PHYSICS, NEW YORK, US, vol. 75, no. 1, 5 July 1999 (1999-07-05), pages 4-6, XP000850655 ISSN: 0003-6951 * the entire document *	1-11	
A	US 6 097 147 A (O'BRIEN DIARMUID F ET AL) 1 August 2000 (2000-08-01) * the entire document *	1-11	
			TECHNICAL FIELDS SEARCHED (InCL7)
			H01L H05B C09K C07F
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search	Date of completion of the search	Examiner	
MUNICH	3 April 2003	Nemes, C	
CATEGORY OF CITED DOCUMENTS		<p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>.....</p> <p>A : member of the same patent family, corresponding document</p>	
<p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p>			

EPO FORM 1503 (3.02) (P04007)



European Patent  
Office

INCOMPLETE SEARCH  
SHEET C

Application Number  
EP 01 12 2939

Claim(s) searched completely:

-

Claim(s) searched incompletely:

1-11

Reason for the limitation of the search:

Present claims 1-11 relate to an extremely large number of possible compounds/apparatus. Support within the meaning of Article 84 EPC and disclosure within the meaning of Article 83 EPC is to be found, however, for only a very small proportion of the compounds/apparatus claimed. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Consequently, the search has been carried out for those parts of the claims which appear to be supported and disclosed, namely those parts relating to the compounds/apparatus wherein the metal coordination compound is used in a device.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 2939

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-04-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0057676	A	28-09-2000	AU	3908400 A	09-10-2000
			BR	0009215 A	16-04-2002
			CN	1350768 T	22-05-2002
			EP	1181842 A1	27-02-2002
			JP	2002540572 T	26-11-2002
			WO	0057676 A1	28-09-2000
			US	2003017361 A1	23-01-2003
			US	2002034656 A1	21-03-2002
-----					
US 6097147	A	01-08-2000	AU	5921699 A	03-04-2000
			EP	1116417 A1	18-07-2001
			JP	2002525808 T	13-08-2002
			WO	0016593 A1	23-03-2000
			US	2003017361 A1	23-01-2003
			US	2002034656 A1	21-03-2002
-----					

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**